




# SUGGESTED MOUNTING FOR LUMES

## Series L4, L8, L9


### **SURFACE & MARINE INSIDE**

1. Turn cam action lens retaining latch to open position to remove lens.
2. Remove reflector/ballast cover by turning the two (2) quarter-turn fasteners.
3. Mount luminaire to surface utilizing four (4) mounting holes.
5. Make all necessary wiring connections.
- 5a. Marine Inside models require wiring connections to terminal block.
6. Replace reflector/ballast cover, lamp(s) and secure lens back to luminaire.

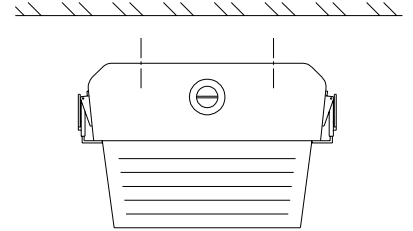


### **MARINE INSIDE DRIP PROOF**

1. Turn cam action lens retaining latch to open position to remove lens.
2. Remove reflector/ballast cover by turning the two (2) quarter-turn fasteners.
3. Mount luminaire to surface utilizing four (4) mounting holes in brackets on back of luminaire.
4. Make all necessary wiring connections to terminal block.
5. Replace reflector/ballast cover, lamp(s) and secure lens back to luminaire.

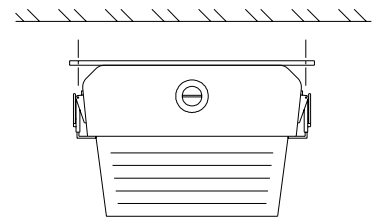


### **CHAIN**

1. Turn cam action lens retaining latch to open position to remove lens.
2. Remove reflector/ballast cover by turning the two (2) quarter-turn fasteners.
3. Mount four (4) 1-1/2" mounting brackets to holes to back of luminaire. Hang luminaire using "S" hooks inserted into holes in brackets, hang from chain, crimp hooks closed.
4. Make all necessary wiring connections.
5. Replace reflector/ballast cover, lamp(s) and secure lens back to luminaire.

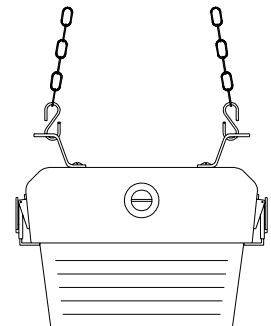

### **PENDANT**

1. Turn cam action lens retaining latch to open position to remove lens.
2. Remove reflector/ballast cover by turning the two (2) quarter-turn fasteners.
3. Install pendants to luminaire.
4. Make all necessary wiring connections.
5. Replace reflector/ballast cover, lamp(s) and secure lens back to luminaire.

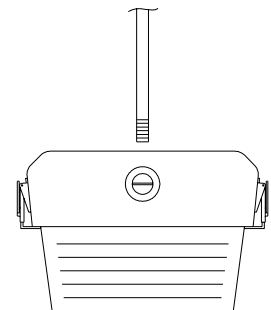

**H.O. Models** require 1-1/2" spacing from mounting surface (Brackets supplied).

**V.H.O. Models** require 6" spacing from mounting surface.

**Cleaning Instructions:** Wipe luminaire with a soft cloth slightly dampened with warm, soapy water. On stainless steel units, tightly adhering deposits may be removed by using a stainless steel polishing powder. Never use steel wool or steel brushes on stainless steel. Always rub in the directions of the polish lines.

**Note:** All luminaires to be installed by a qualified electrician.  
Mounting and electrical hardware not supplied by Paramount Industries unless otherwise noted.