




G4 Rear Access Series FLUORESCENT | GRID

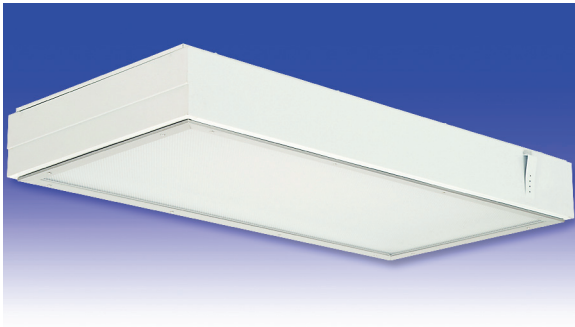

2x TECHNISEAL® APPLICATIONS:

- UL/CUL Listed Wet Location
- Cleanroom (Classes 100-100,000; ISO Classes 5-9)
- UL/CUL Hazardous Location (Class I, Division 2; Groups A, B, C & D; Class II, Division 2; Groups F & G)
- NSF Certified Food Processing (Splash Zone, Food Zone)
- Industrial & Commercial
- Transit

BENEFITS:

- Luminaires adaptable to your specific needs
- Accessible from rear or front for servicing

FEATURES:

- Premium electronic ballast standard
- Available in stainless steel construction
- Every luminaire tested with lamps to assure customer satisfaction
- 5 year limited warranty
- Proudly made in **USA**

SPECIFICATIONS:

HOUSING:

Constructed of nominal 20GA (.036) zinc coated steel for unmatched corrosion protection. Two welded, tapered, threaded flanges on the top provide a sealed wireway access. All seams are sealed with a long life acrylic sealant.

Food Zone: All external metal components of stainless steel (S3 option std).

REFLECTOR:

Fabricated of zinc coated steel, painted with a minimum reflectance of 88%.

LENS FRAME:

Exclusively designed, heavy duty, extruded, anodized aluminum with stainless steel captive screws used to hold the lens frame tight to the housing. The frame is hinged for support while servicing.

Food Zone: All external metal components of stainless steel (S3 option std).

GASKETING:

An extruded, ribbed vinyl gasket seals the lens into the frame; with our exclusive, mechanically held, extruded, silicone gasket used to seal the frame to the housing.

Food Zone: Silicone sealant is used to seal the lens into the frame, with extruded EPDM sealing the frame to the housing.

FINISH:

Painted surfaces are two mil white polyester enamel, special colors available.

LENS:

.140 extruded prismatic acrylic with 50% DR content for durability, smooth side out.

Food Zone: .156 extruded prismatic polycarbonate, smooth side out.

ELECTRICAL:


All ballasts and lampholders are UL Listed.

MOUNTING:

Grid or custom detail available.


TEMPERATURE CODE:

Class I, Div. 2= T5 (100°C); Class II, Div. 2= T5 (100°C)

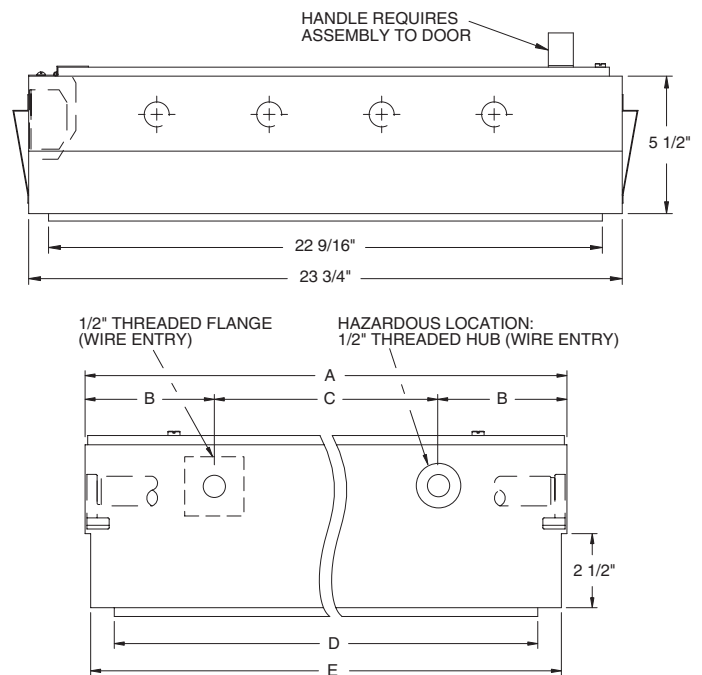


LENGTH	DIMENSIONS IN INCHES				
	A	B	C	D	E
2 FT	23 29/32	1 31/32	20	22 9/16	23 17/32
3 FT	35 29/32	1 31/32	32	34 1/2	35 17/32
4 FT	47 29/32	1 31/32	44	46 1/2	47 17/32


LENS FRAME DETAILS:




ALUMINUM LENS FRAME DETAIL




STAINLESS STEEL LENS FRAME DETAIL



HAZ. LOC. STAINLESS STEEL LENS FRAME DETAIL



SPLASH ZONE LENS FRAME DETAIL



FOOD ZONE LENS FRAME DETAIL



Hazardous Location:




Food Processing:



G4 RA Series

PHOTOMETRICS: For additional photometry, go to paramountlighting.com

Model G44324-R5, 4FT, Specular Reflector and Prismatic Acrylic Lens, 4 32W T8 Fluorescent Lamps, Lamp Lumen Rating = 3050

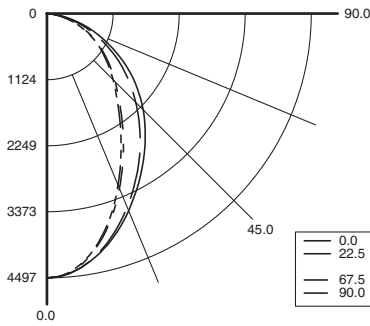

Coefficients of Utilization, Zonal Cavity Method

Floor Cavity Reflectance: 20%

RC	.8				.7				.5				.3				.1				0
	RW	.7	.5	.3	.1	.7	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	0		
R 0	84	84	84	84	82	82	82	82	78	78	78	75	75	75	72	72	72	71	0		
C 1	78	75	72	69	76	73	71	68	70	68	66	67	66	64	65	63	62	61	0		
R 2	71	66	61	58	69	65	60	57	62	59	56	60	57	54	58	55	53	52	0		
3	65	58	53	49	64	57	52	48	55	51	48	53	50	47	52	49	46	44	0		
4	60	52	46	42	59	51	46	42	50	45	41	48	44	41	46	43	40	39	0		
5	56	47	41	37	54	46	41	36	45	40	36	43	39	36	42	38	35	34	0		
6	52	43	37	32	50	42	36	32	41	36	32	40	35	32	39	35	31	30	0		
7	48	39	33	29	47	38	33	29	37	32	29	36	32	28	35	31	28	27	0		
8	45	36	30	26	44	35	30	26	34	29	26	34	29	26	33	29	26	24	0		
9	42	33	27	24	41	33	27	24	32	27	24	31	27	23	30	26	23	22	0		
10	40	31	25	22	39	30	25	22	30	25	22	29	25	21	28	24	21	20	0		

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2991	24.5	34.6
0-40	4553	37.3	52.6
0-60	7239	59.3	83.7
0-90	8650	70.9	100
90-120	0	0	0
90-130	0	0	0
90-150	0	0	0
90-180	0	0	0
0-180	8650	70.9	100

Total Luminaire Optical Efficiency = 70.9%

Spacing Criterion: 0° = 1.07, 90° = 0.91

2x TECHNISEAL® REAR ACCESS GRID TROFFER ORDERING INFORMATION:

SERIES	LAMP QTY	LAMP TYPE	LENS	OPT MAT	GRID	OPTIONS	VOLTAGE
G4	Wet Location Cleanroom	2* 3*	2 .125 Clear Acrylic (No Pattern) 3 .125 White Acrylic			EM2 Bodine BDL700 WET/IOTA I-48-DL WET or similar EM3 Bodine BDL500 WET/IOTA I-320-DL WET or similar EM4 Bodine BDL900 WET/IOTA I-40-DL WET or similar EM8 Bodine BHD65U HAZ. LOC.	120V-277V/60Hz STD 347V/60Hz
HG4*	Hazardous	4* Standard	4 .140 Prismatic Acrylic (P12) (base)			D1 Lutron Dimming ECO-10 D2 Electronic Dimming D4 < 10% THD (Consult Factory) E0 Low-Temp Electronic (N/A T12RS & VHO) E2 2 Electronic Ballasts E3 3 Electronic Ballasts E4 4 Electronic Ballasts E9 Rapid Start Electronic Ballast	50Hz & Other Voltages Available
SG4	Splash Zone		6 .125 Clear Polycarbonate (No Pattern) 7 .125 White Polycarbonate			BALLASTS (SPECIFY VOLTAGE) F1 GLR/HLR Fusing (Fast) F2 GMF/HLR Fusing (Slow)	
FG4	Food Zone		8 .156 Prismatic Polycarbonate (P12) 9 .187 Tempered Glass (P62)			FUSING H0 Special Lens (Specify) H2 .150 Extra Heavy Clear Acrylic H3 .150 Extra Heavy White Acrylic H5 .156 C73 Tempered Glass H6 .187 Clear Tempered Glass J0 Lamp Sleeves (Specify Color) J2 .060 Clear Acrylic Overlay J4 .020 White Acrylic Overlay (Lamp Side) J6 .080 Clear Polycarbonate Overlay J7 Louver (Specify) J9 RFI Lens (Specify Pattern) K3 .187 KSH-12 Acri-Tuf Acrylic K6 External Prisms (N/A Splash/Food Zones)	
14T5	F14T5 (2FT)	0°	LENSES AVAILABLE FOR FOOD ZONE 6 .125 Clear Polycarbonate (No Pattern) 7 .125 White Polycarbonate			MISC P9 Special Paint Color (Provide Paint Code & Chip) R5 Specular Aluminum Reflector S1 Special Material (Consult Agent) T3 Tamper Resistant (Hex w/pin STD, Others Avail) V1 External Gasketing V3 No Silicone Sealant Used W4 Inboard Outboard Wiring (Dual Switching) Y5 RFI Suppressors	
17*	F17T8 (2FT)	0°	8 .156 Prismatic Polycarbonate (P12) (base) 9 .187 Tempered Glass (P62)				
24T5H	F24T5/HO (2FT)	0°	Colored acrylic lens available, consult agent.				
25	F25T8 (3FT)	0°					
28T5	F28T5 (4FT)	0°					
32*	F32T8 (4FT)	0°					
48T8H	F48T8/HO (4FT)	-20°					
54T5H	F54T5/HO (4FT)	0°					
* Lamp Type Available for Hazardous Location.							
*S2 Stainless Steel Housing *S3 Stainless Steel Exterior *S5 Stainless Steel Lens Frame Only							
* Note: If Stainless Steel is ordered, 304 SS Standard 316 SS and other materials available, consult agent.							
G1 1 1/2" T-Bar G2 2" T-Bar 1 Inch T-Bar Standard							

Add hyphens between options

Other Wattages and Lengths Available, Consult Factory.

NSF Food Processing Note:

Food Zone (F prefix) luminaires come in DIRECT CONTACT with food. Splash Zone (S prefix) units may become soiled, but are outside the danger of recontamination.

Information subject to change without notice. Lamps supplied by others.

© 2010 Paramount Industries, Inc. P.O. Box 259 Crosswell, MI 48422

Project Information: