



HB3/PB3 32" FA Series FLUORESCENT | FLANGE



Shown with optional equipment

32" BOOTH LITE APPLICATIONS:

- UL/CUL Listed Wet Location
- UL/CUL Hazardous Location (Class I, Division 2; Groups A, B, C & D Class II, Division 2; Groups F & G)
- UL Listed Hazardous Location Spray Booth

BENEFITS:

- Front access
- HB Series Suitable for UL Class I, Div.2 and Class II, Div.2 locations
- PB Series Suitable for paint spray booths

FEATURES:

- Adjustable specular reflector system available
- Premium electronic ballast standard
- Every luminaire tested with lamps to assure customer satisfaction
- 5 year limited warranty
- Proudly made in **USA**

SPECIFICATIONS:

HOUSING:

Constructed of nominal 20GA (.036) zinc coated steel for unmatched corrosion protection. One welded, tapered, threaded hub provides a sealed wireway access. All seams are sealed with long life acrylic sealant.

REFLECTOR:

Fabricated of zinc coated steel, painted with a minimum reflectance of 88%.

OPTIONAL REFLECTOR SYSTEM:

Clear tempered glass lens (H6 option) and fully adjustable individual specular reflectors (R9 option) designed to independantly direct light from each lamp.

LENS FRAME:

18GA (.048) stainless steel with captive quarter turn fasteners used to hold the lens frame tight to the housing. Continuous angles welded in place secure lens to frame. The frame is supported by a full length piano hinge. Convenience items: "D" ring provides easy access, and prop rod holds lens out of the way for servicing.

GASKETING:

Non-silicone gasket used to seal lens to frame. EPDM is used to seal the frame to the housing.

FINISH:

Painted surfaces are two mil of white polyester enamel.

LENS:

.187 Pattern 62 tempered glass.

ELECTRICAL:

All ballasts and lampholders are UL Listed.


MOUNTING:

Supplied with 16GA (.060) stainless steel flange. 304 SS standard, 316 SS and other materials also available. Custom size flanges available. Contact Sales Representative for information.


TEMPERATURE CODE:

Class I, Div. 2= T4 (135°C); Class II, Div. 2= T3C (160°C)


STD Reflector



R9 Option



1/2" THREADED HUB (WIRE ENTRY)

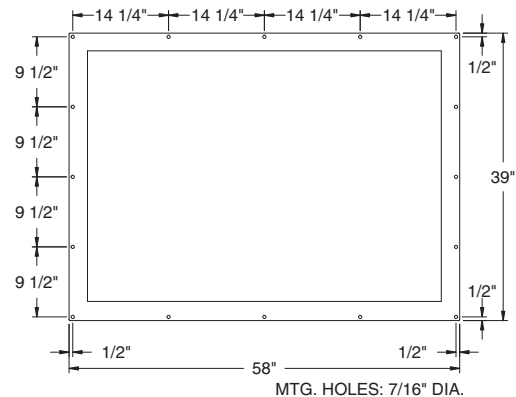

NOMINAL HOUSING DIMENSIONS IN INCHES		
LUMINAIRE	HOUSING	PANEL CUT-OUT SIZE
2 FT x 4 FT	32 x 48 1/8	34 x 50 3/4



Hazardous Location:




HB3/PB3 32" FA Series



PHOTOMETRICS: For additional photometry, go to paramountlighting.com

Model PB36329-H6-R9-FA, 4FT, Adjust. Specular Reflectors And Clear Tempered Glass Lens, 6 32W T8 Fluorescent Lamps, Lamp Lumen Rating = 2900

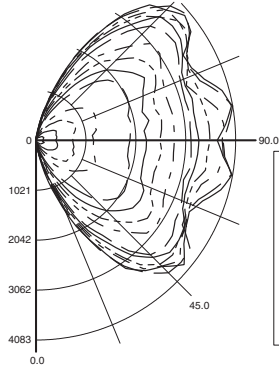

Coefficients of Utilization, Zonal Cavity Method

Floor Cavity Reflectance: 20%

RC	.8				.7				.5				.3				.1				0
RW	.7	.5	.3	.1	.7	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	0
R 0	75	75	75	75	69	69	69	69	58	58	58	48	48	48	39	39	39	35	35	35	35
C 1	65	60	56	52	59	55	51	48	46	43	40	37	35	33	29	27	26	22	22	22	22
R 2	57	50	45	40	52	46	41	37	38	34	30	30	27	24	23	21	19	15	15	15	15
3	51	43	36	31	47	39	33	29	32	27	24	25	22	19	19	17	14	11	11	11	11
4	46	37	30	25	42	34	28	23	28	23	19	22	18	15	16	14	11	8	8	8	8
5	42	33	26	21	38	30	24	19	24	19	16	19	15	12	14	11	9	7	7	7	7
6	38	29	22	17	35	26	20	16	21	17	13	17	13	10	13	10	7	5	5	5	5
7	35	26	19	15	32	23	18	13	19	14	11	15	11	9	11	8	6	4	4	4	4
8	33	23	17	13	29	21	15	11	17	13	9	14	10	7	10	7	5	3	3	3	3
9	30	21	15	11	27	19	14	10	15	11	8	12	9	6	9	6	4	3	3	3	3
10	28	19	13	9	25	17	12	9	14	10	7	11	8	5	8	6	4	2	2	2	2

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	263	2	2
0-40	764	4	6
0-60	2591	15	21
0-90	6061	35	50
90-120	3492	20	29
90-150	5848	34	48
90-180	6115	35	50
0-180	12176	70	100

Total Luminaire Optical Efficiency = 70.0%
Spacing Criterion: 0° = -0.01, 90° = -0.01

32" BOOTH LITE—FRONT ACCESS ORDERING INFORMATION:

SERIES	LAMP QTY	LAMP TYPE	9 LENS	FA ACCESS	OPTIONS	VOLTAGE
HB3 Hazardous PB3 Spray Paint Booth	6 7* 8*		9 .187 Tempered Glass (P62)		EMERGENCY B9 Bodine B65U Hazardous Location (0-50°C) BALLASTS D4 < 10% THD (Consult Factory) E2 2 Electronic Ballasts E3 3 Electronic Ballasts E8 High Light Output 32W T8 Ballast E9 Rapid Start Electronic Ballast FUSING F1 GLR/HLR Fusing (Fast) F2 GMF/HLR Fusing (Slow) LENSING H5 .156 C73 Tempered Glass H6 .187 Clear Tempered Glass MISC R5 Specular Aluminum Reflector R9 Adjustable Specular Aluminum Reflector System	120V/60Hz Standard 277V/60Hz 347V/60Hz 50Hz & Other Voltages Available
32 F32T8 (4FT) 48T8H F48T8/HO (4FT)	0° -20°				Add hyphens between options	

* Not available with the R9 Optional Adjustable Reflector System

Project Information:

Information subject to change without notice. Lamps supplied by others.

© 2005 Paramount Industries, Inc. P.O. Box 259 Croswell, MI 48422