

T4 Series

FLUORESCENT | SURFACE **S**



ASSEMBLY LINE LITE

APPLICATIONS:

- UL/CUL Listed
Damp Location
- Industrial & Commercial

BENEFITS:

- Luminaires adaptable to your specific needs

FEATURES:

- Easy access to lamps, unique lift off lens frame & cam action latches
- Premium electronic ballast standard
- Every luminaire tested with lamps to assure customer satisfaction
- 5 year limited warranty
- Proudly made in **USA**

SPECIFICATIONS:

HOUSING:

Constructed of 18GA (.048) zinc coated steel for unmatched corrosion protection. Two welded, tapered, threaded hubs on the ends of the housing provides a sealed wireway access. All seams are sealed with long life acrylic sealant.

LENS FRAME:

Unique "Lift Off" designed frame is fabricated of nominal 20GA (.036) stainless steel, with cam action latches to hold the lens frame tight to the housing.

GASKETING:

An extruded ribbed vinyl gasket seals the lens into the frame and extruded EPDM is used to seal the lens frame to the housing.

FINISH:

Painted surfaces are two mil of white polyester enamel, special colors are available.

LENS:


.125 white translucent cell cast virgin acrylic.

ELECTRICAL:


All ballasts and lampholders are UL Listed.

MOUNTING:


Chain or custom detail available. For further information, contact Sales Representative.

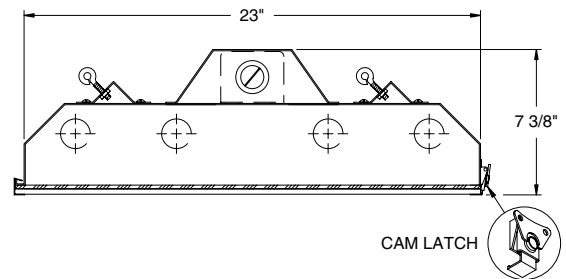

4 FT LUMINAIRE

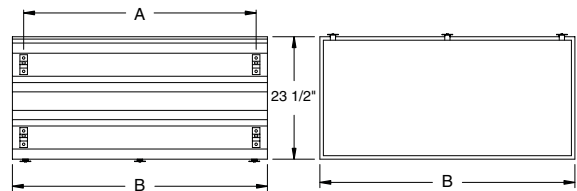

8 FT LUMINAIRE

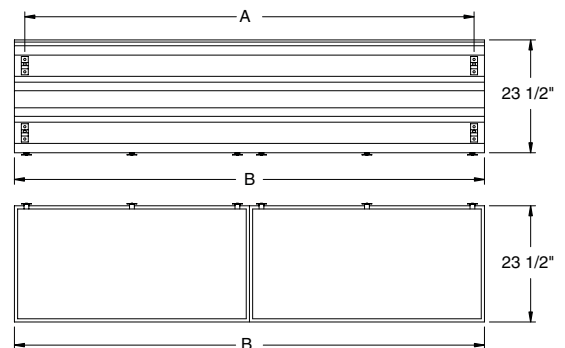

LENGTH	DIMENSIONS IN INCHES	
	A	B
4 FT	44 11/16	48 1/8
8 FT	90 11/16	96 1/8

