




SUGGESTED MOUNTING FOR Y6 RECREATION LITE

1. Attach brackets with supplied screws, hang luminaire as specified, with hinge side up and latch side down.
2. Power supply entry utilizes 1/2" knockout through luminaire end.
Remove access plates on back of luminaire and make all necessary wiring connections, replace access plates.
3. Unlatch and remove lens frame assembly.
4. Install lamps and replace lens frame.

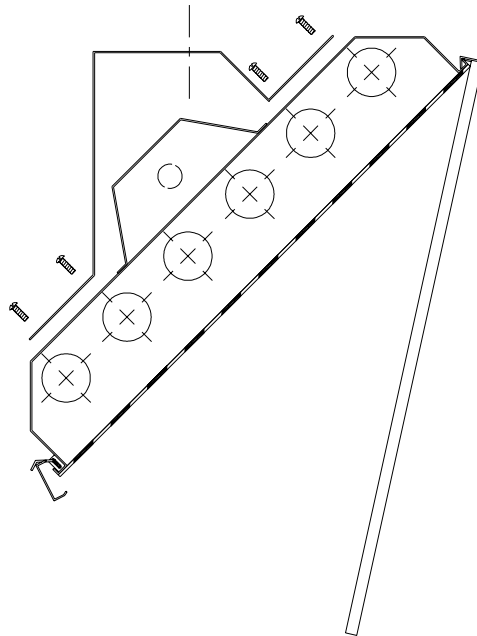

Cleaning Instructions: Wipe luminaire with a soft cloth slightly dampened with warm, soapy water. On stainless steel units, tightly adhering deposits may be removed by using a stainless steel polishing powder. Never use steel wool or steel brushes on stainless steel. Always rub in the directions of the polish lines.

Note: All luminaires to be installed by a qualified electrician.
Mounting and electrical hardware not supplied by Paramount Industries unless otherwise noted.